

DC Distributor 2pin Lemo 0B



The product is solely and exclusively available for commercial customers and shall be used by skilled personnel only.

Use the product only for the purpose described in this document. Always follow the valid instructions and system requirements for all equipment involved.

Description

Series of compact voltage distributors with 2pin Lemo 0B sockets. Due to the small size and the many configuration possibilities, the distributors are perfectly suited to be mounted on the camera or to be used in a WCU setup.

All distributors are made of aluminium, black anodised and have a CE marking.

Apart from an LED which indicates the presence and polarity of voltage, the distributors doesn't contain any further electronics, such as overvoltage or over current protection (aka. fuse), reverse polarity protection or similar.



Never connect **two** voltage sources at the same time!!

In all distributors, the housings of the sockets have an electrical connection to each other in order to protect the electronics of the camera when connecting accessories with HD-SDI interface. This requires the use of shielded cables and avoiding plugs with plastic housings (e.g. D-Tap).

More information from Arri:

- [Video explaining the phenomenon](#)
- [technical information](#) (ca. 82kB)

Features

- *Size "S": three or two¹⁾ interfaces, Lemo 0B.302*
- *Size "M": five or four²⁾ interfaces, Lemo 0B.302*
- *matching plugs³⁾: FGG.0B.302.CLAD, FPG.0B.302.CLAD⁴⁾, FSG.0B.302.CLAD⁴⁾⁵⁾*
- *distributors with fixed supply cable have a dedicated input⁶⁾*
- *fixed supply cable with D-Tap or Lemo connector⁷⁾*
- *Size "S", no cable: **all** interfaces can be used as input **or** output*
- *Size "S", no cable: standard Lemo cable (Teradek) can be used as supply line*
- *Size "M": all models with dedicated input⁸⁾*

- **Size "M":** wide range of different supply cables available
- presence and polarity display of voltage

technical Details


- Voltage: 9 - 24 V
- Ampere: 0 - 3 A
- Temperature: -10 - 40°, not condensing

Model Overview

There are two different sizes available, each with a fixed cable or with a detachable, separate supply cable.

Size "S"

Dimensions

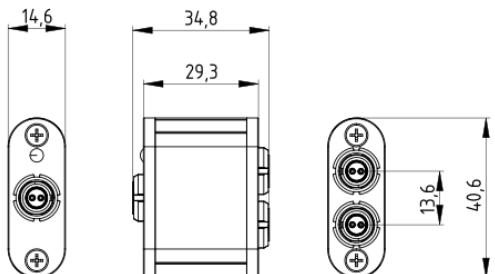

Weight: ca. 35g (without bracket)

Without Fixed Cable




Fixed Cable



Size "M"

Dimensions

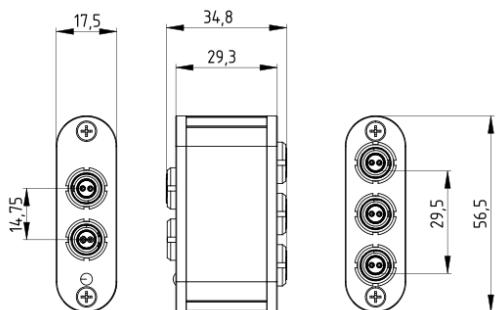

Weight: ca. 50g (without bracket)

No Cable




Fixed Cable



Disposal



The product can be returned to the manufacturer. When disposing of accessories, please observe the relevant manufacturer's instructions.

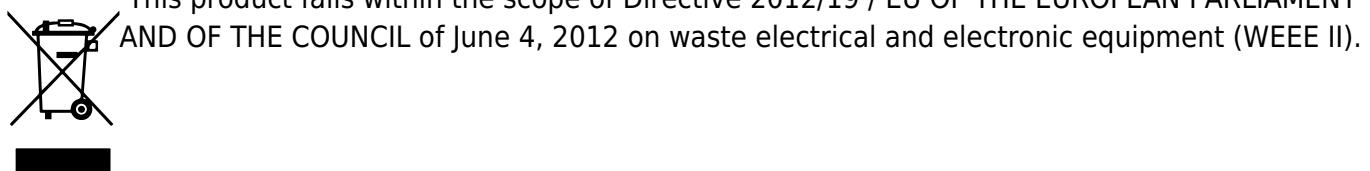

This product falls within the scope of Directive 2012/19 / EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of June 4, 2012 on waste electrical and electronic equipment (WEEE II).

Accordingly, this product must not be disposed of with household waste. There are the respective country-specific disposal rules that must be observed.

¹⁾ ²⁾,

with fixed supply line without Lemo 0B.302 plug

³⁾

input and output

⁴⁾

angle plug

⁵⁾

adjustable right angle plug

⁶⁾ ⁸⁾,

can be used as output, though it's not recommended

⁷⁾

also with angle plug

⁹⁾

for your own 3D printing

¹⁰⁾

for building your own brackets

From:

<https://docs.2eyetec.com/wiki/> - **2EyeTec Manuals**



Permanent link:

https://docs.2eyetec.com/wiki/en/electronic/dc_12v

Last update: **2022/12/22 15:16**